
# **MDF-25V278W**

### -25 °C MEDICAL DEEP FREEZER






#### **FEATURERS**

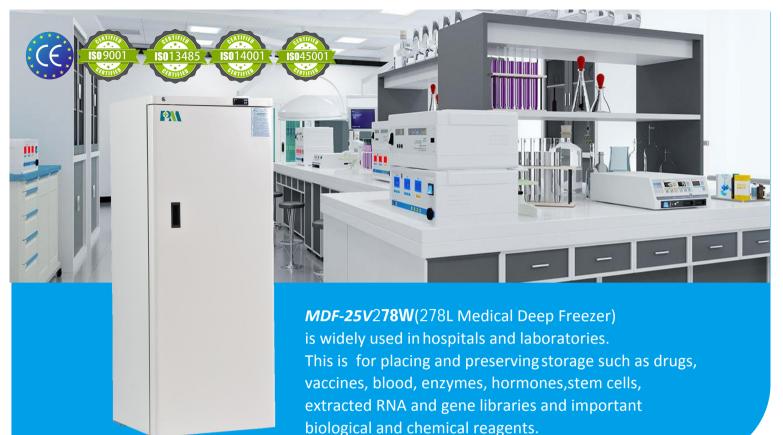

**Universal castor wheels** Proven heavy-duty lockable castors

**Lockable doors** Standard locks with keys



MDF-25V268E Pull Down Test at Ambient



**High-quality steel materials** Antibacterial and corrosion resistant



Precise temp. control Temp. control accurate to 0.1°C




5 types of alarm Audible and visual alarms




Ŷ

Variable space Height adjustable shelves

**Eco-friendly** CFC-free refrigerant and energy-saving





## STRUCTURE





#### PARAMETER

Performance		Refrigeration System		Alarms	
Cooling method	Direct Cooling	Refrigerant	R290	High/low temperature	Y
Defrost	Manual	Temp. controller	Microprocessor	Power failure	Y
Shelf/drawer	draws/7	Sensor	NTC	Sensor error	Y
Temperature range	-10~-25	Display	Digital display	Controller failure	Y
Ambient temperature	<b>10~32°</b> C	External material	SPCC sprayed steel	Door ajar	Y
Noise (db)	/	Compressor QTY	1	Power failure backup	8 hours
Electrical Data		Dimensions		Other	
/oltage frequency( V/Hz)	220V 50Hz	Package size(W*D*H)(mm)	730*670*1850	Inner door Qty	5
Power (W)	280W	Capacity (L/cu.ft)	278/9.81	Remote alarm port	Optional
Current (A)	1.5A	Exterior size(W*D*H)(mm)	670*640*1698	Access port QTY/Dia.	1/25mm
Power consumption	1.5kWh/24h	Interior size(W*D*H)(mm)	480*415*1460	Internal material	SPCC sprayed steel

